
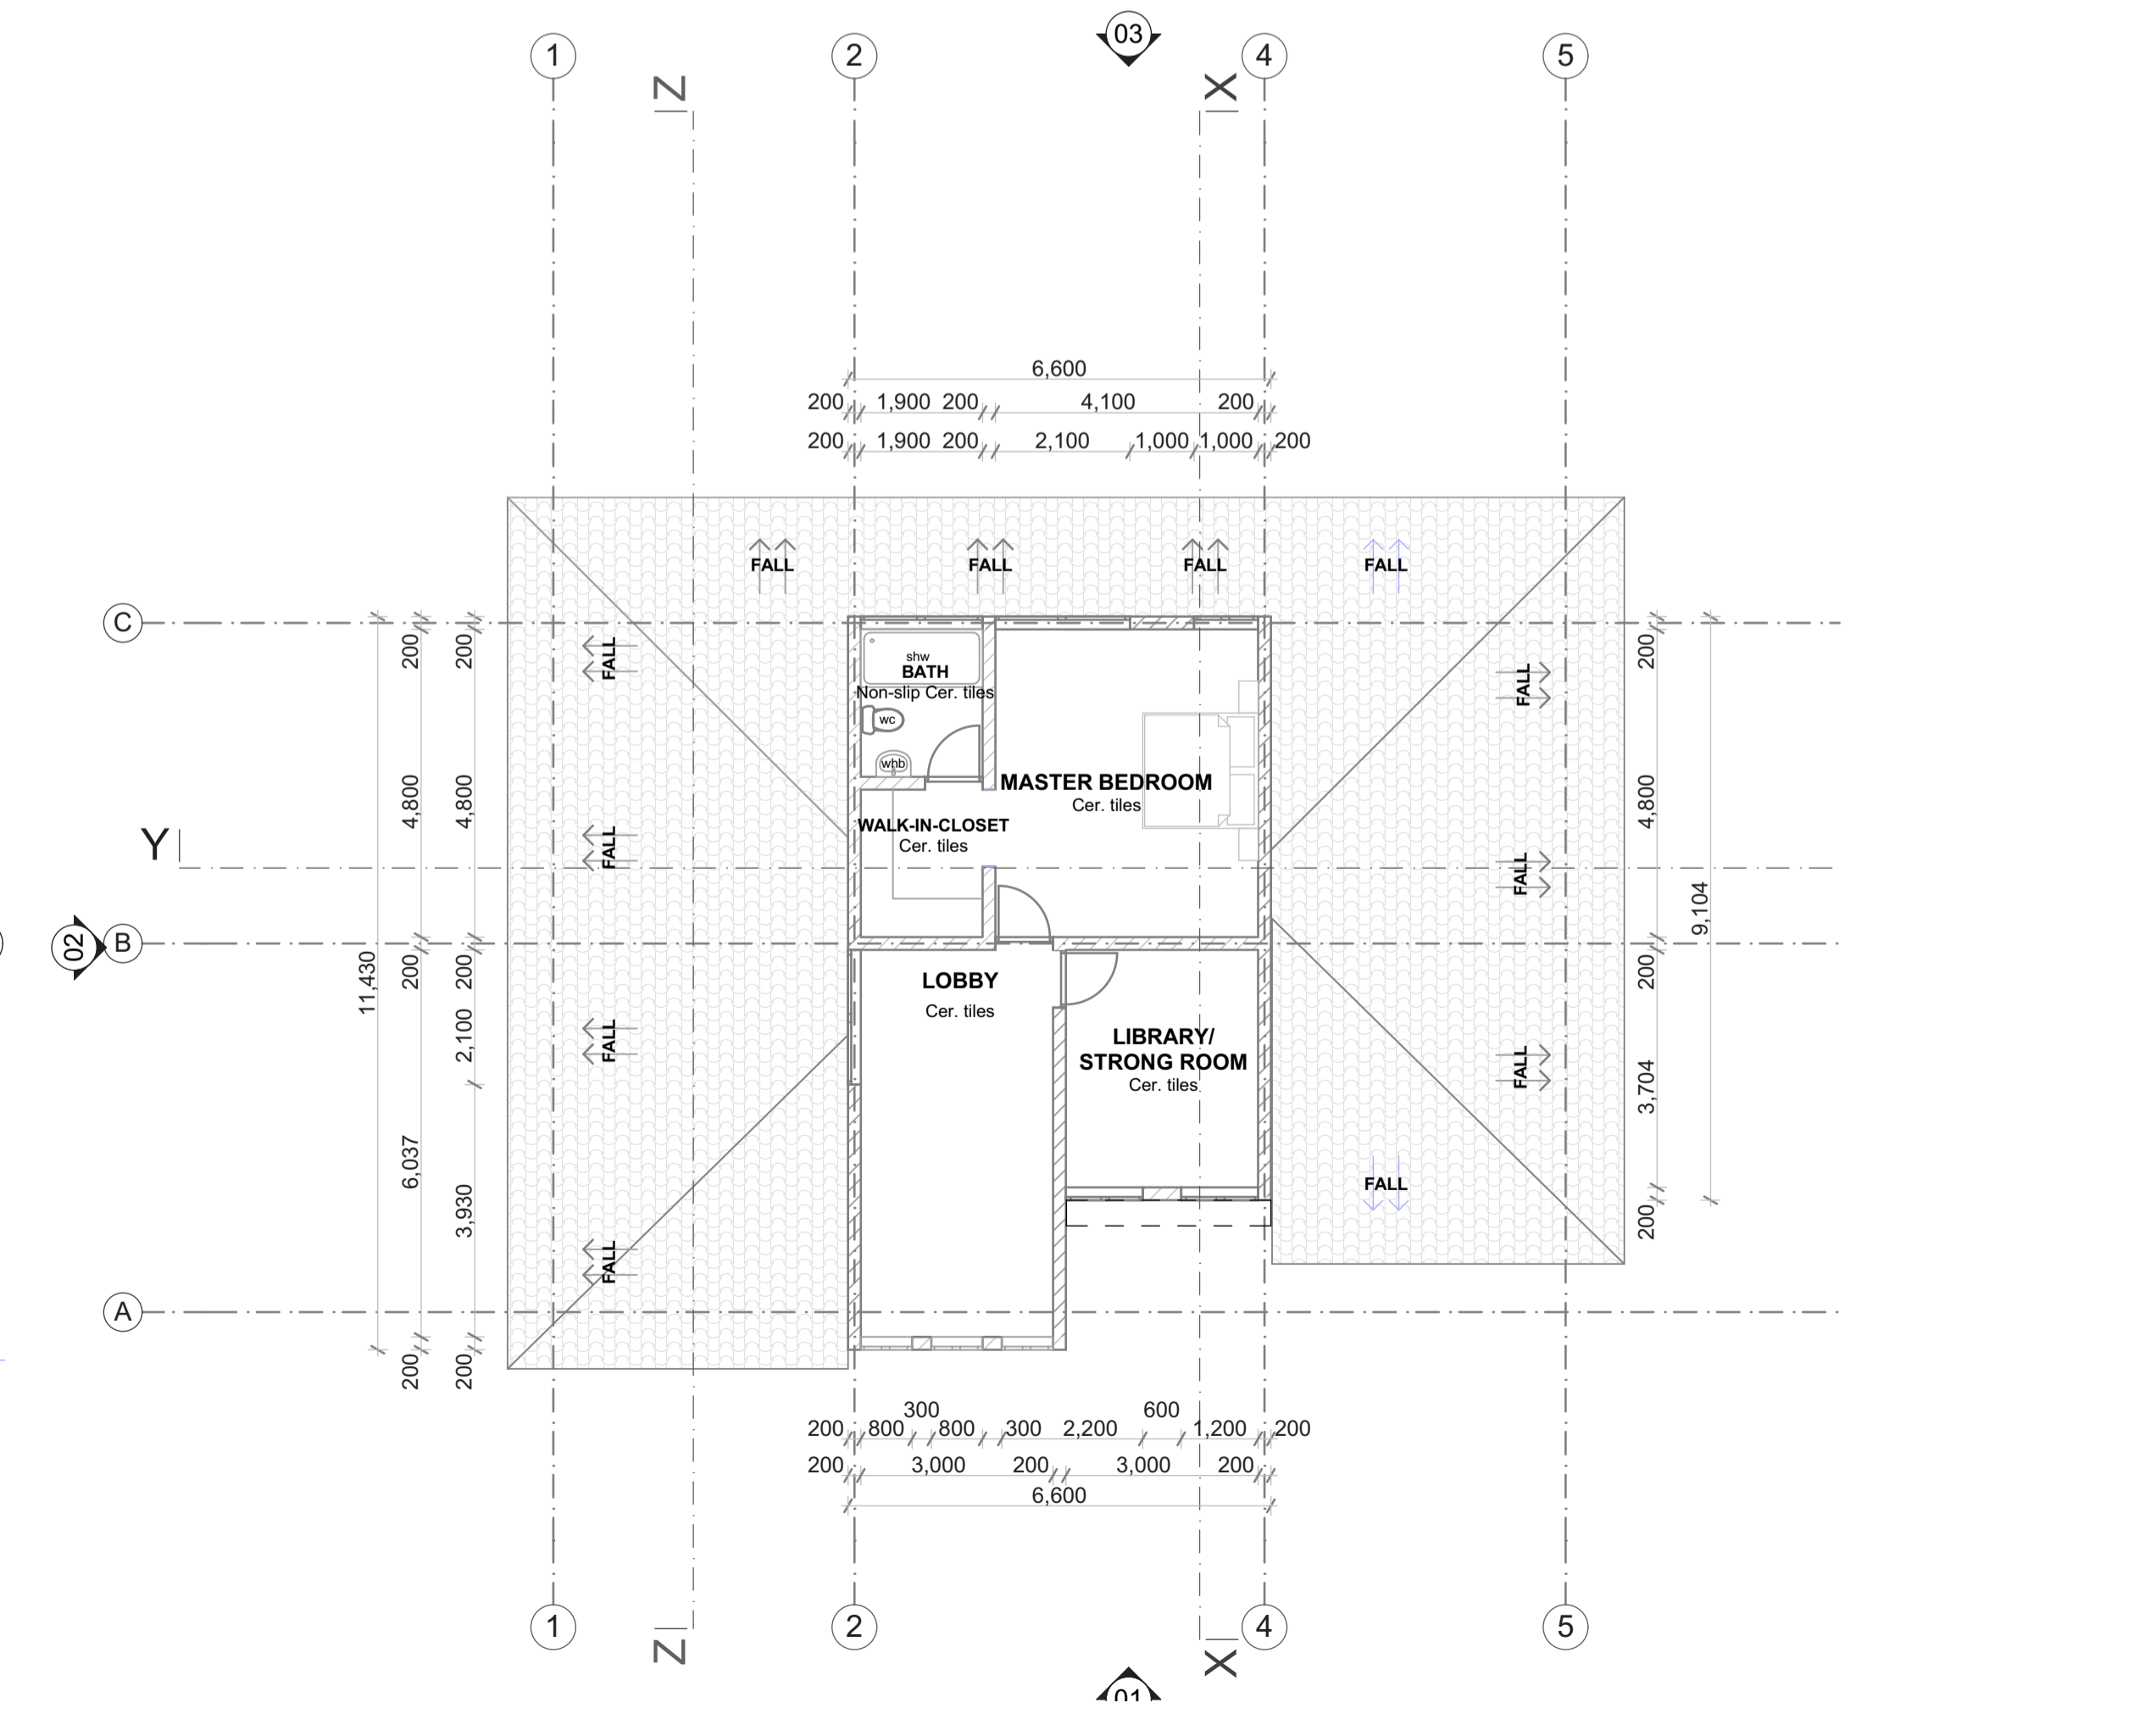
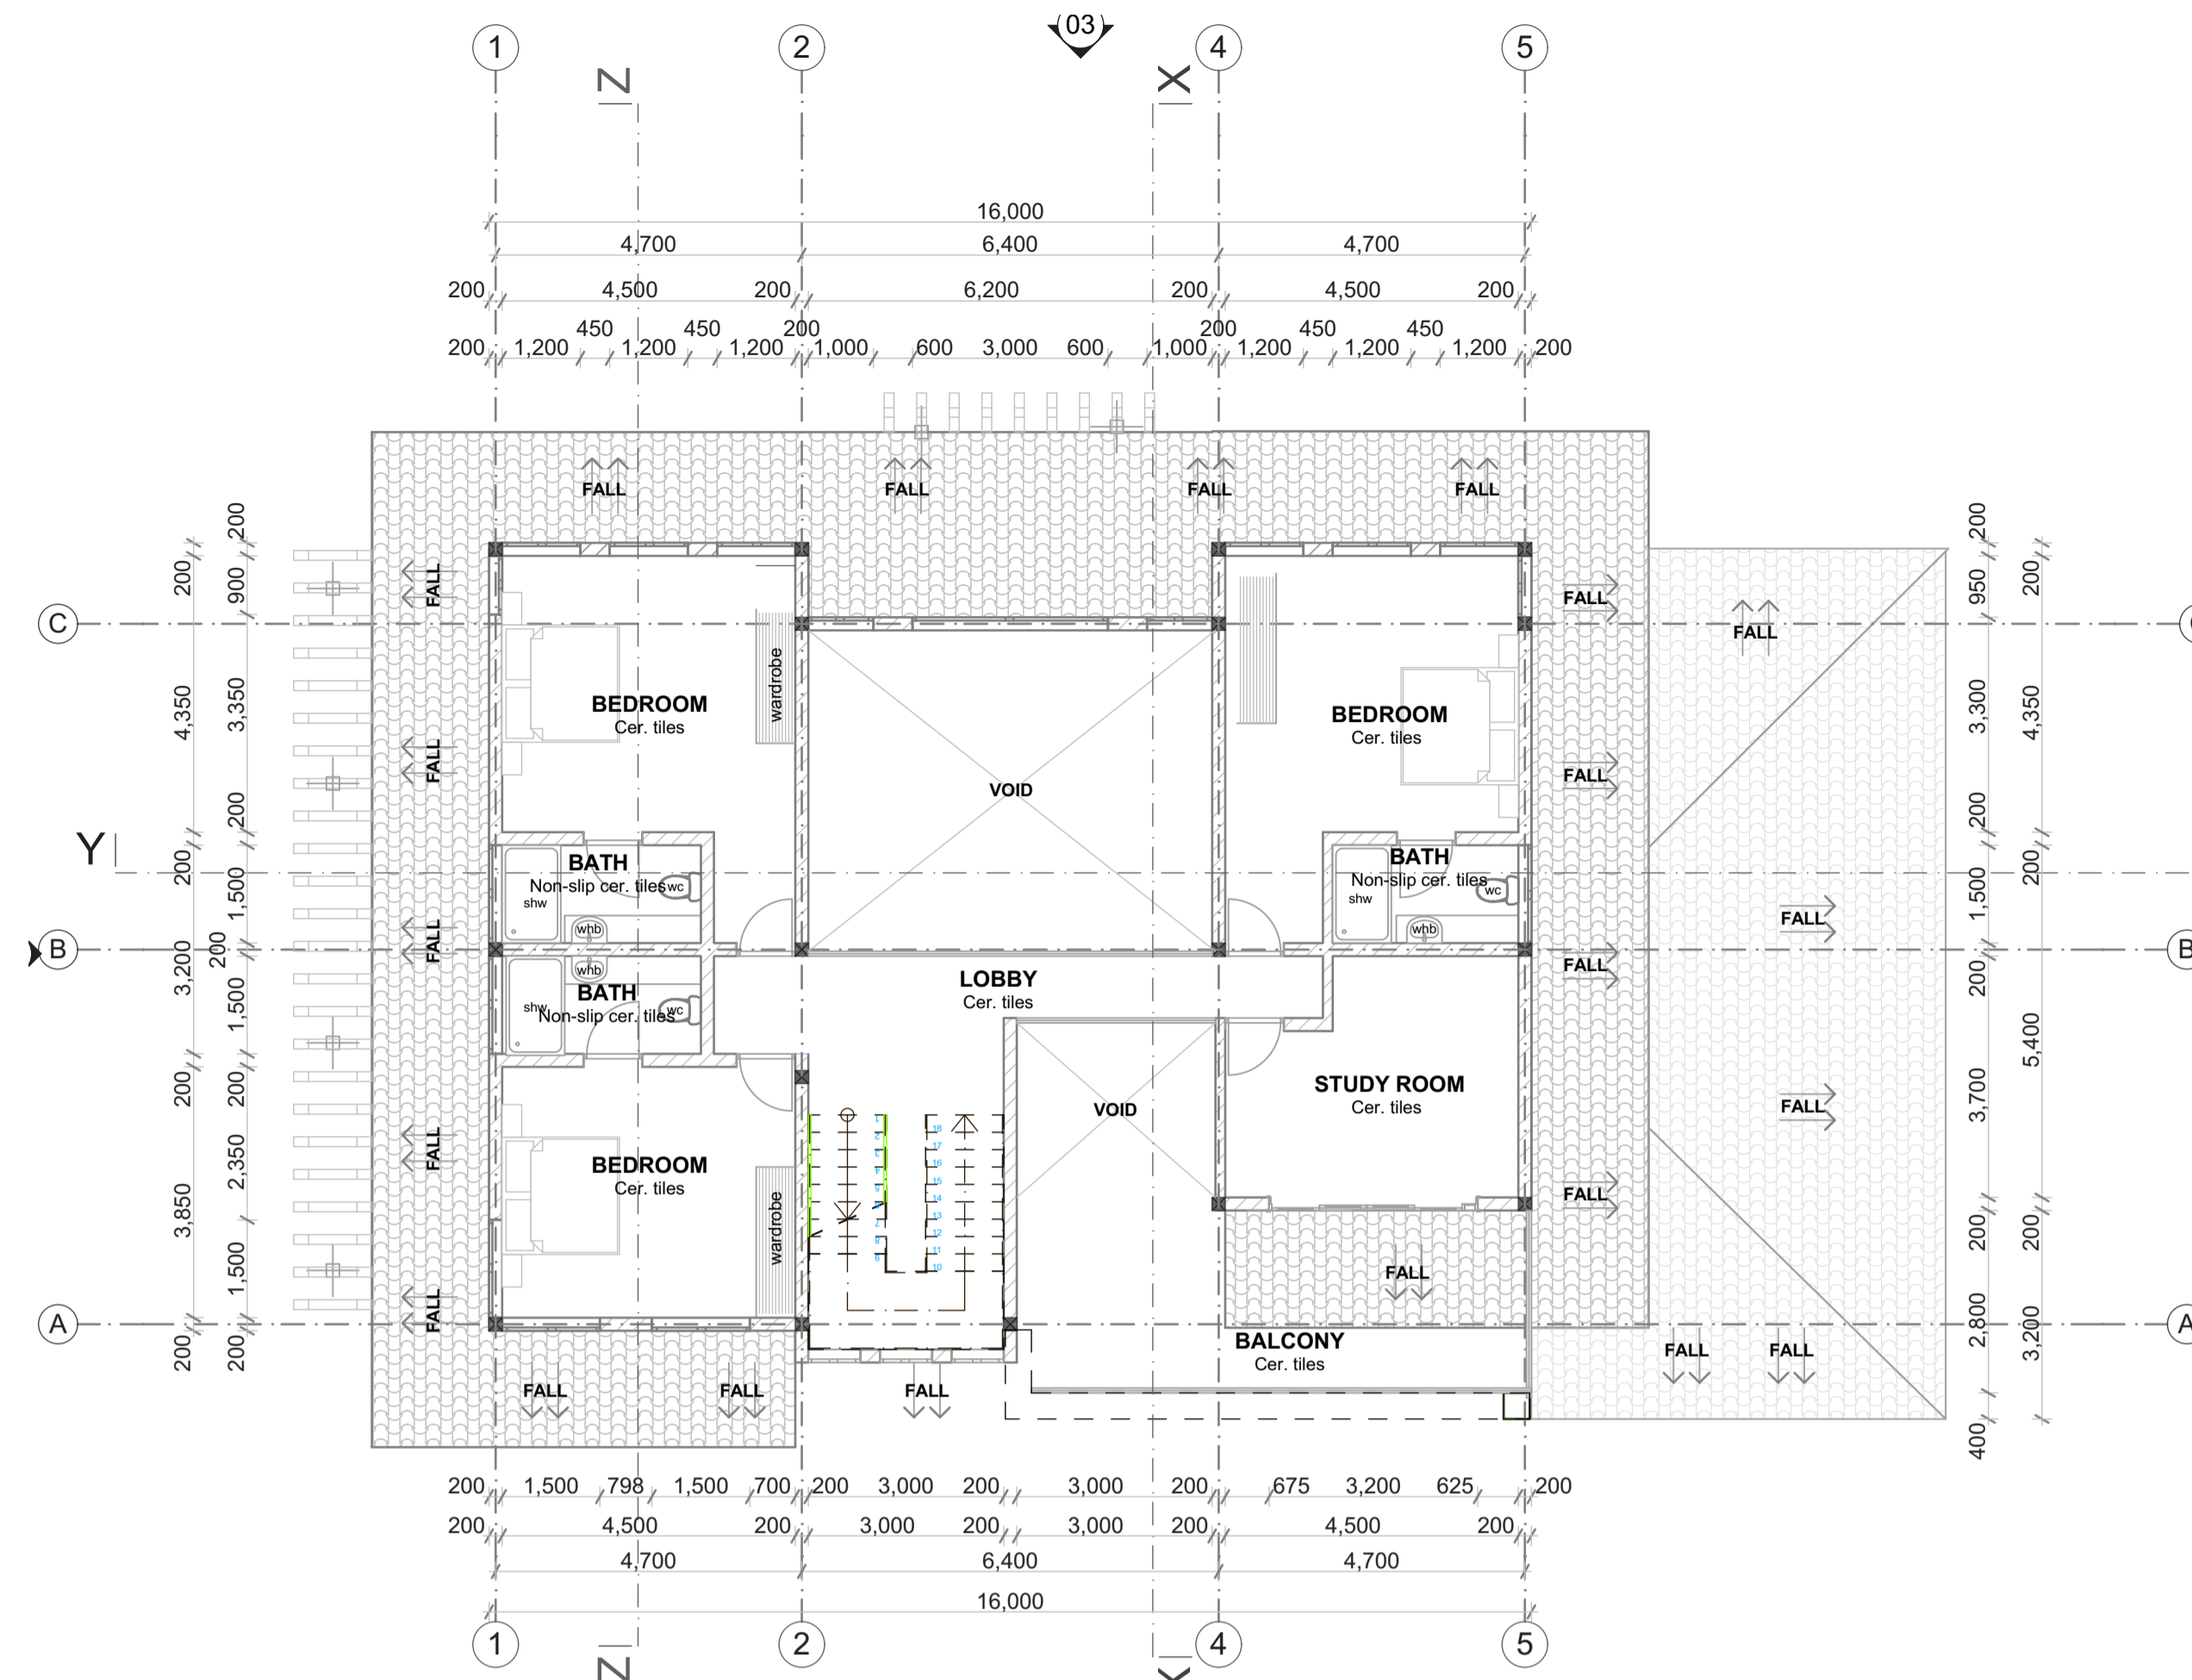


# WORKING DRAWINGS

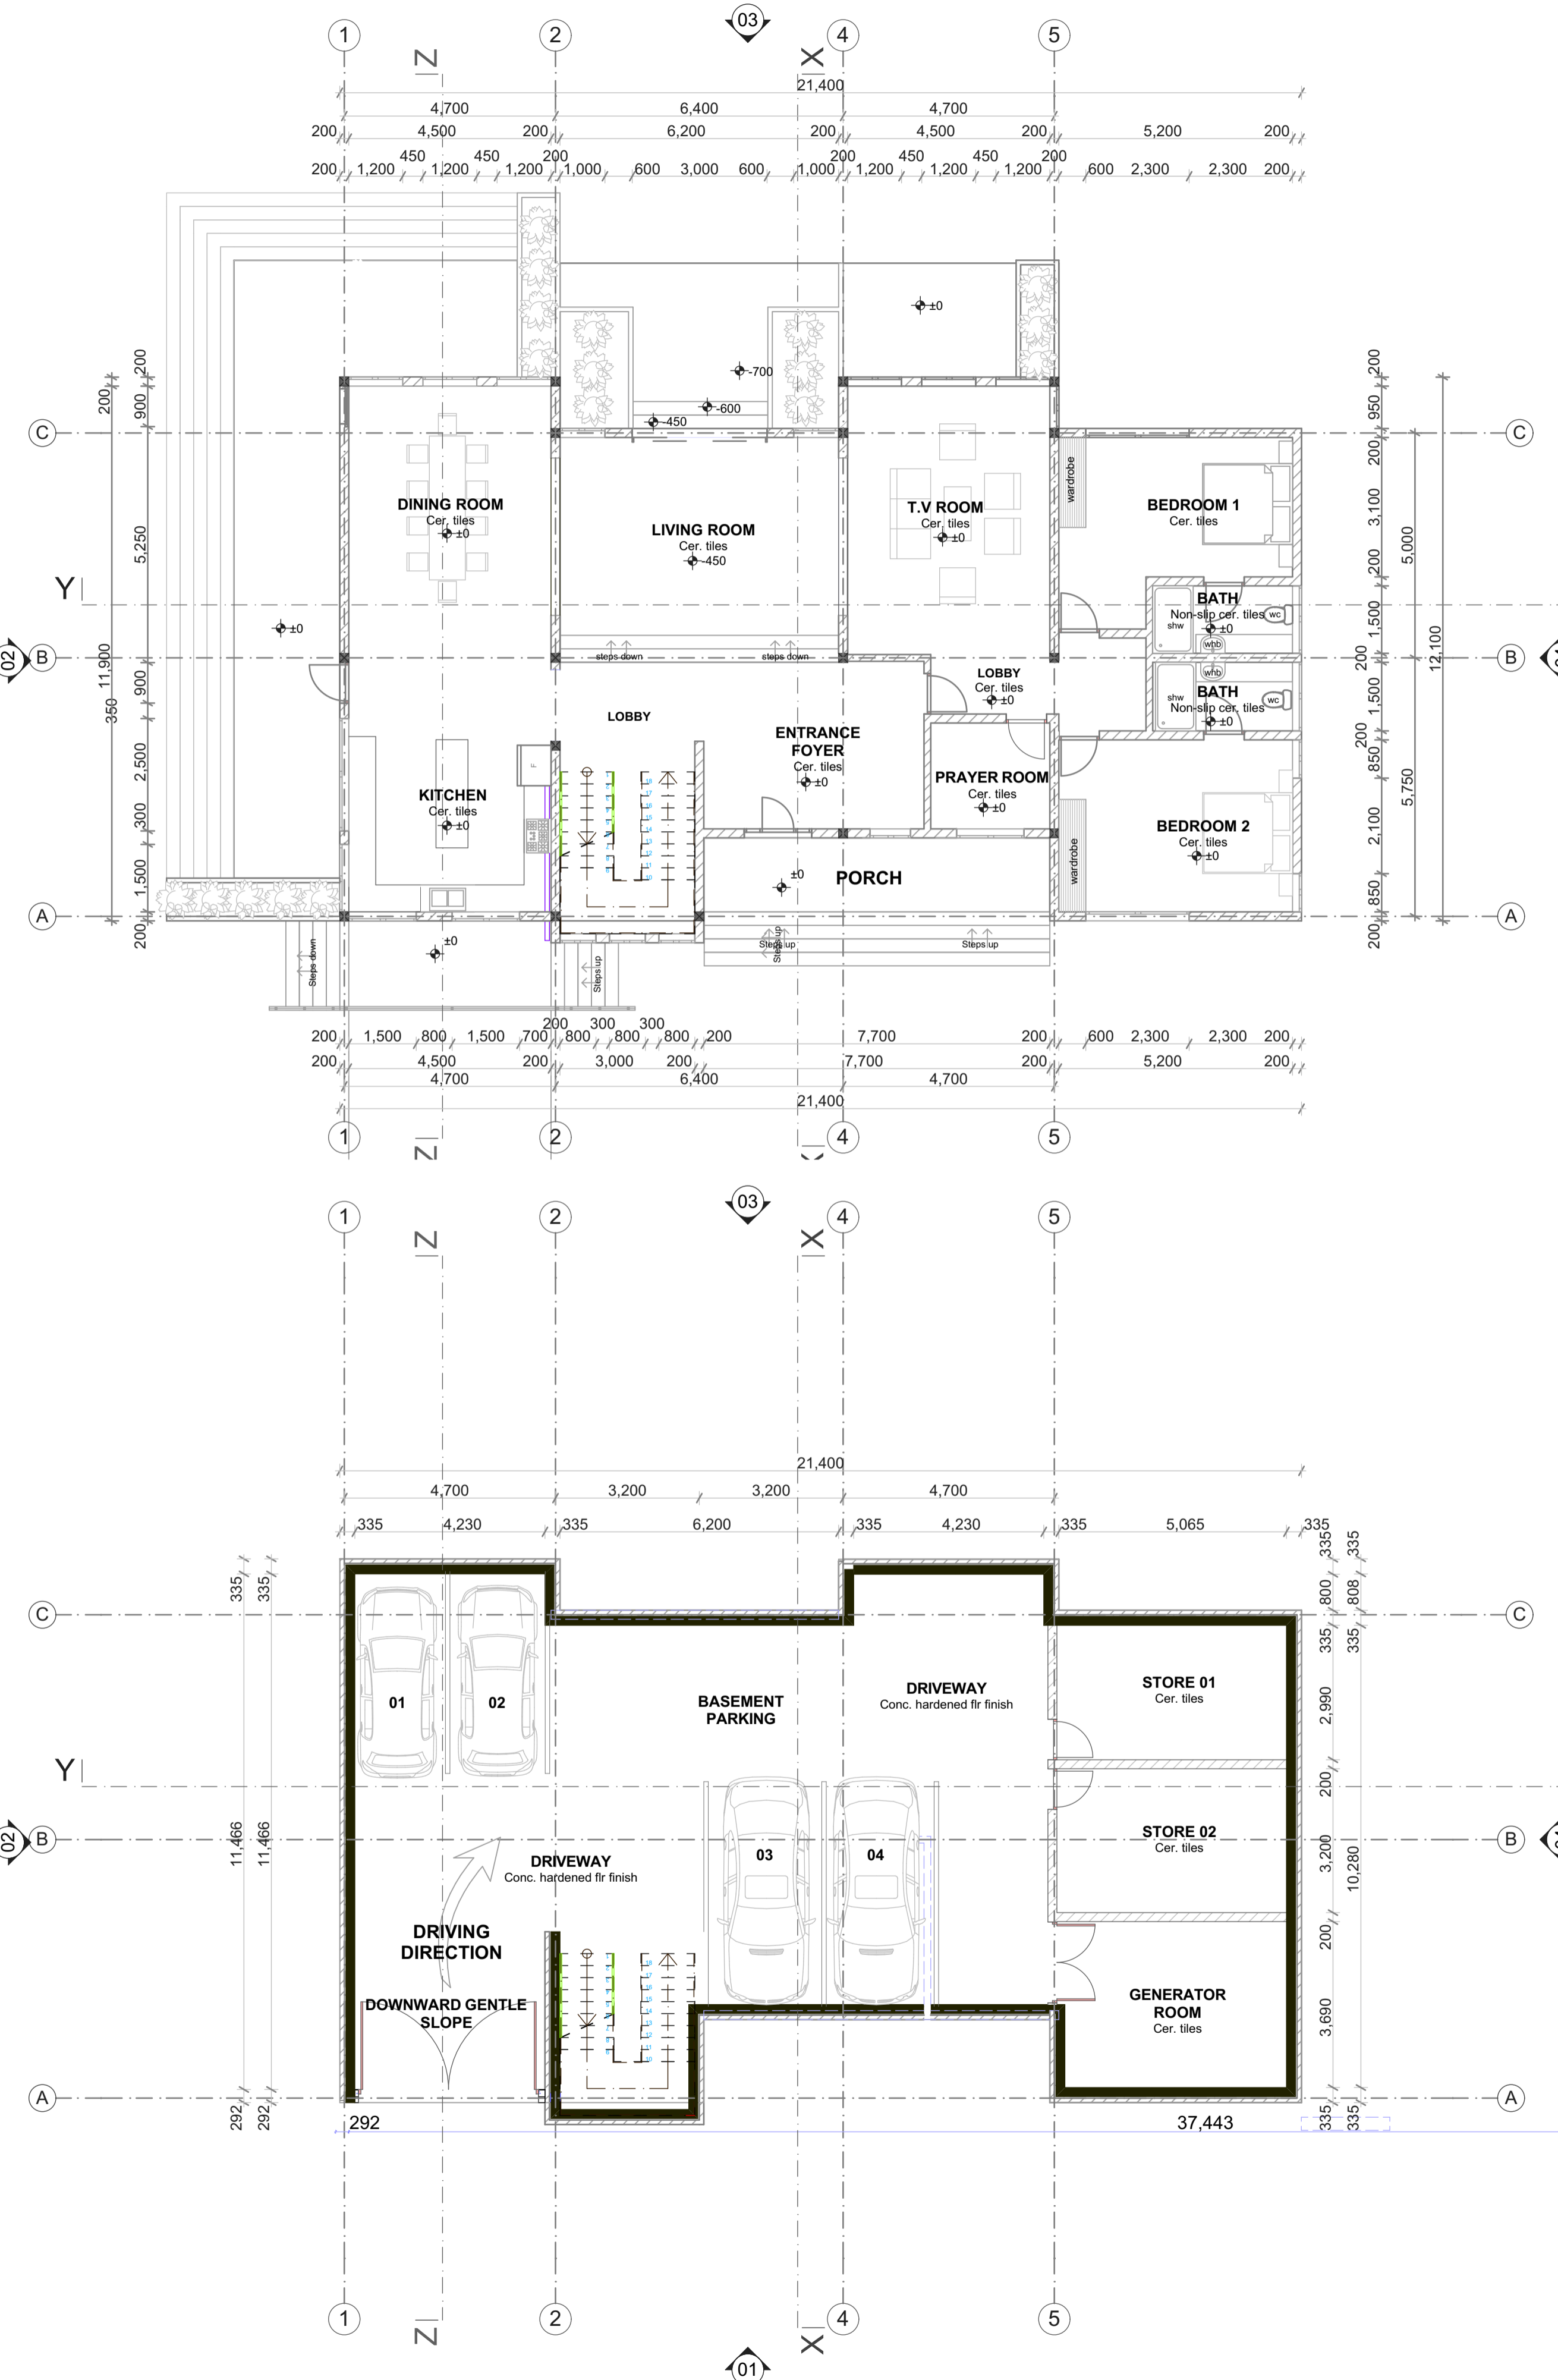

DATE	BY	REVISION

**ARCHITECTURAL NOTES:**

- All works to be carried out in accordance with Local Authority regulations.
- All figured dimensions to be taken in preference to scaled dimensions.
- All walls below 200mm to be reinforced with hoop iron at every alternative course.
- Provide damp proof course (D.P.C.) under all walls.
- P.V. indicates permanent ventilations.
- All drainage passing under building and drive area to be of pvc pipe and encased in 150mm thick concrete surround.
- All inspection chambers in drive area to have heavy duty covers.
- Check all dimensions on site.
- All sanitary work to be in accordance with MOH rules and regulations and Local Authority requirements.
- 500g polythene sheeting and anti-termite treatment to be provided under ground floor concrete slab.
- All reinforced concrete works to Structural Eng. detail.
- Automatic booster pump for FHRs to be provided to the satisfaction of the Chief Fire Officer.
- 4500 liters reserve for hose reel.
- Electrical fire alarm system to the approval of Chief Fire Officer.
- Fire alarm and booster to be provided with secondary power supply.
- 2x9 kg Dry Powder Fire Extinguishers at parking areas.
- 2x9 litre water and 1x4.5 kg CO2 fire extinguishers to be provided per floor.
- Provide illuminated exit signs.
- Provide instructional notices.

**PROJECT**  
**PROPOSED MASSONATE IN MACHAKOS**

**TITLE**


Owner's signature \_\_\_\_\_

Architect's signature \_\_\_\_\_

Scale: AS SHOWN    Date: 04<sup>th</sup> SEP. 2018    Drawn: AYOMA.B.    Checked: E.O.  
Job. No: \_\_\_\_\_    Dwg. No: \_\_\_\_\_

# WORKING DRAWINGS

DATE	BY	REVISION

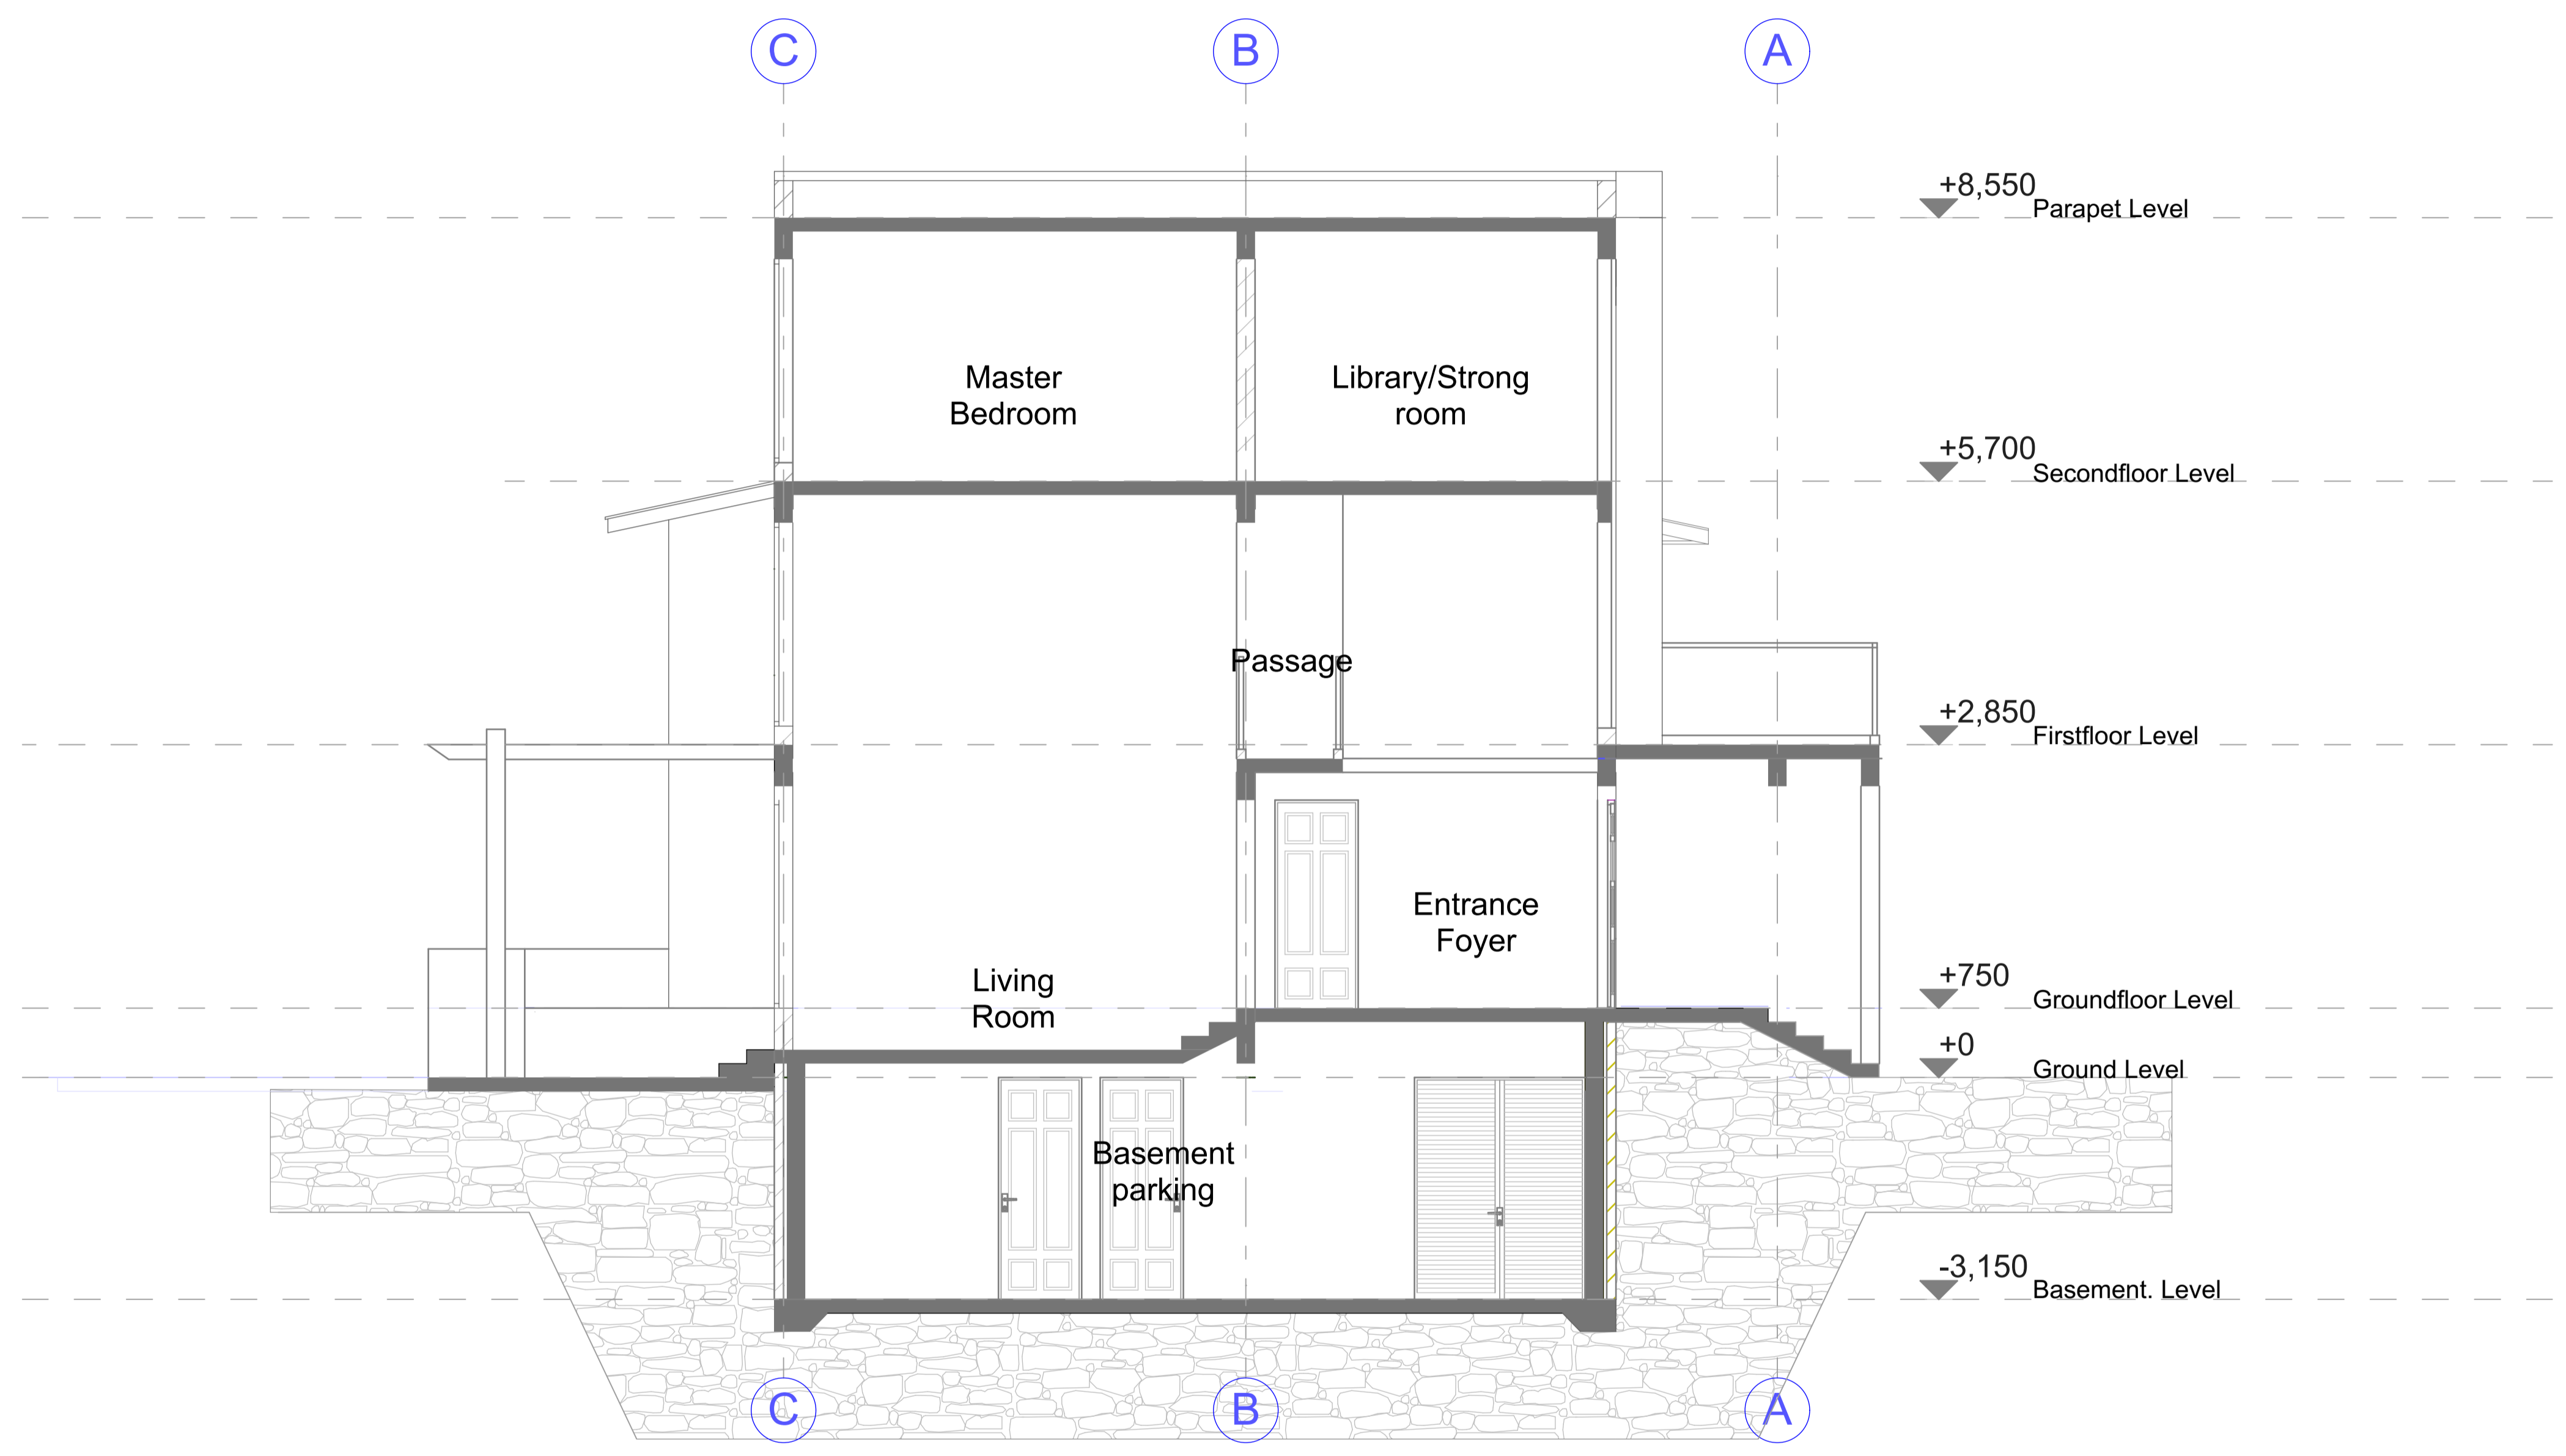

- ARCHITECTURAL NOTES.
- All works to be carried out in accordance with Local Authority regulations.
  - All figured dimensions to be taken in preference to scaled dimensions.
  - All walls below 200mm to be reinforced with hoop iron at every alternative course.
  - Provide damp proof course (D.P.C.) under all walls.
  - P.V. indicates permanent ventilations.
  - All drainage passing under building and drive area to be of pvc pipe and encased in 150mm thick concrete surround.
  - All inspection chambers in drive area to have heavy duty covers.
  - Check all dimensions on site.
  - All sanitary work to be in accordance with MOH rules and regulations and Local Authority requirements.
  - 500g polythene sheeting and anti-termite treatment to be provided under ground floor concrete slab.
  - All reinforced concrete works to Structural Eng. detail.
  - Automatic booster pump for FHRs to be provided to the satisfaction of the Chief Fire Officer.
  - 4500 liters reserve for hoses reel.
  - Electrical fire alarm system to the approval of Chief Fire Officer.
  - Fire alarm and booster to be provided with secondary power supply.
  - 2x9 kg Dry Powder Fire Extinguishers at parking areas.
  - 2x9 litre water and 1x4.5 kg CO2 fire extinguishers to be provided per floor.
  - Provide illuminated exit signs.
  - Provide instructional notices.

PROJECT  
**PROPOSED MASSONATE IN MACHAKOS**

TITLE

Owner's signature \_\_\_\_\_



Architect's signature \_\_\_\_\_

Scale: AS SHOWN	Date: 04 <sup>th</sup> SEP, 2018	Drawn: AYOMA.B.	Checked: E.O.
Job. No:	Dwg. No:		



# WORKING DRAWINGS

DATE	BY	REVISION

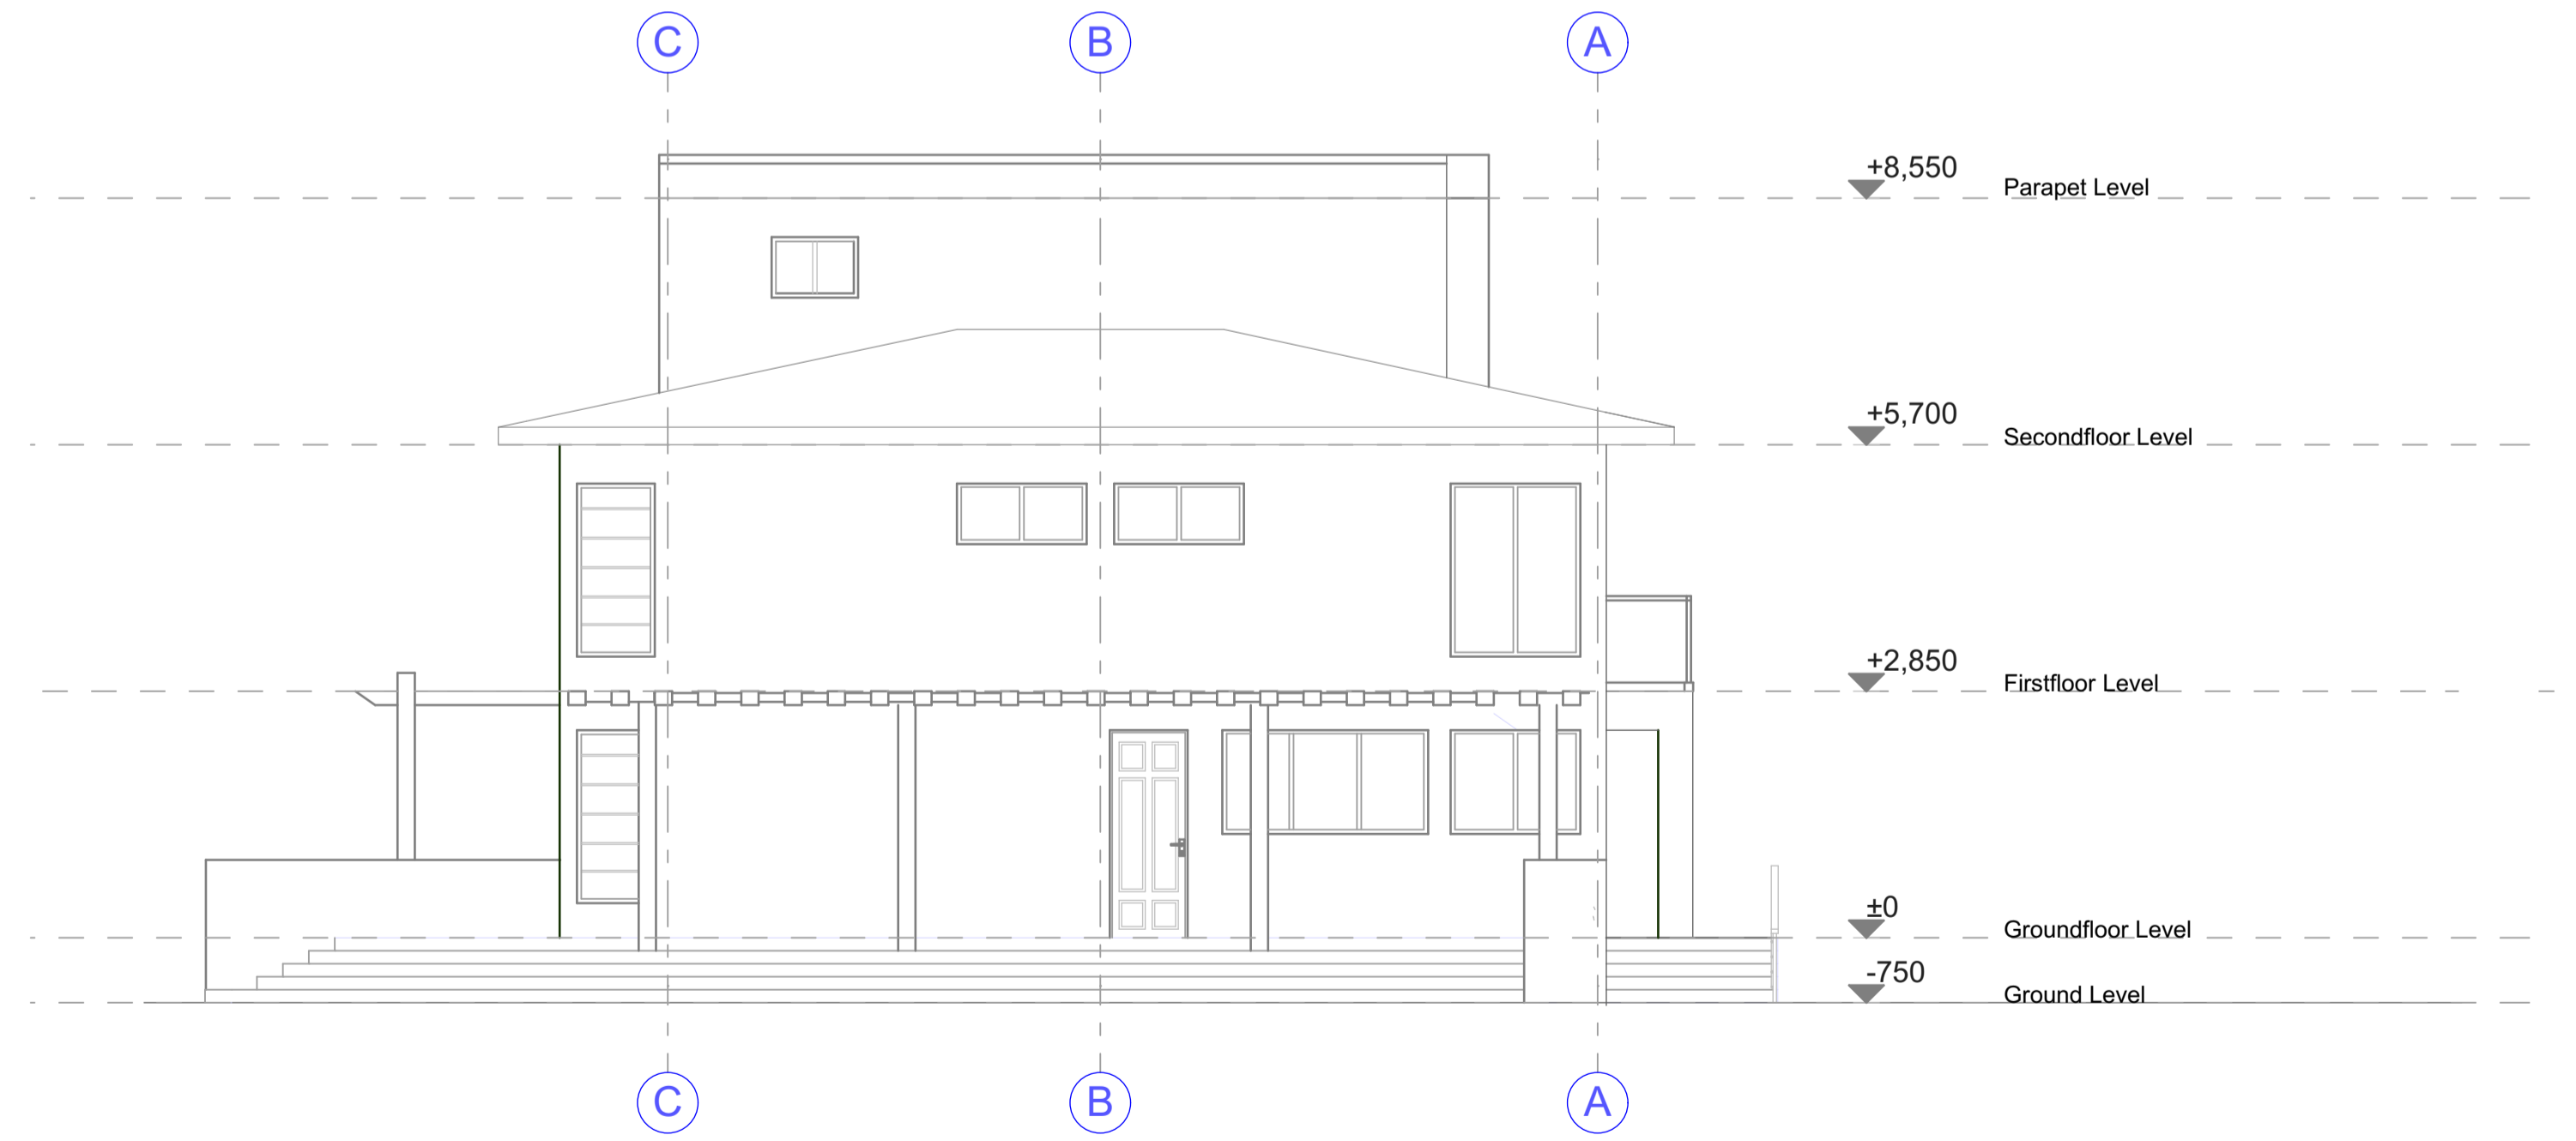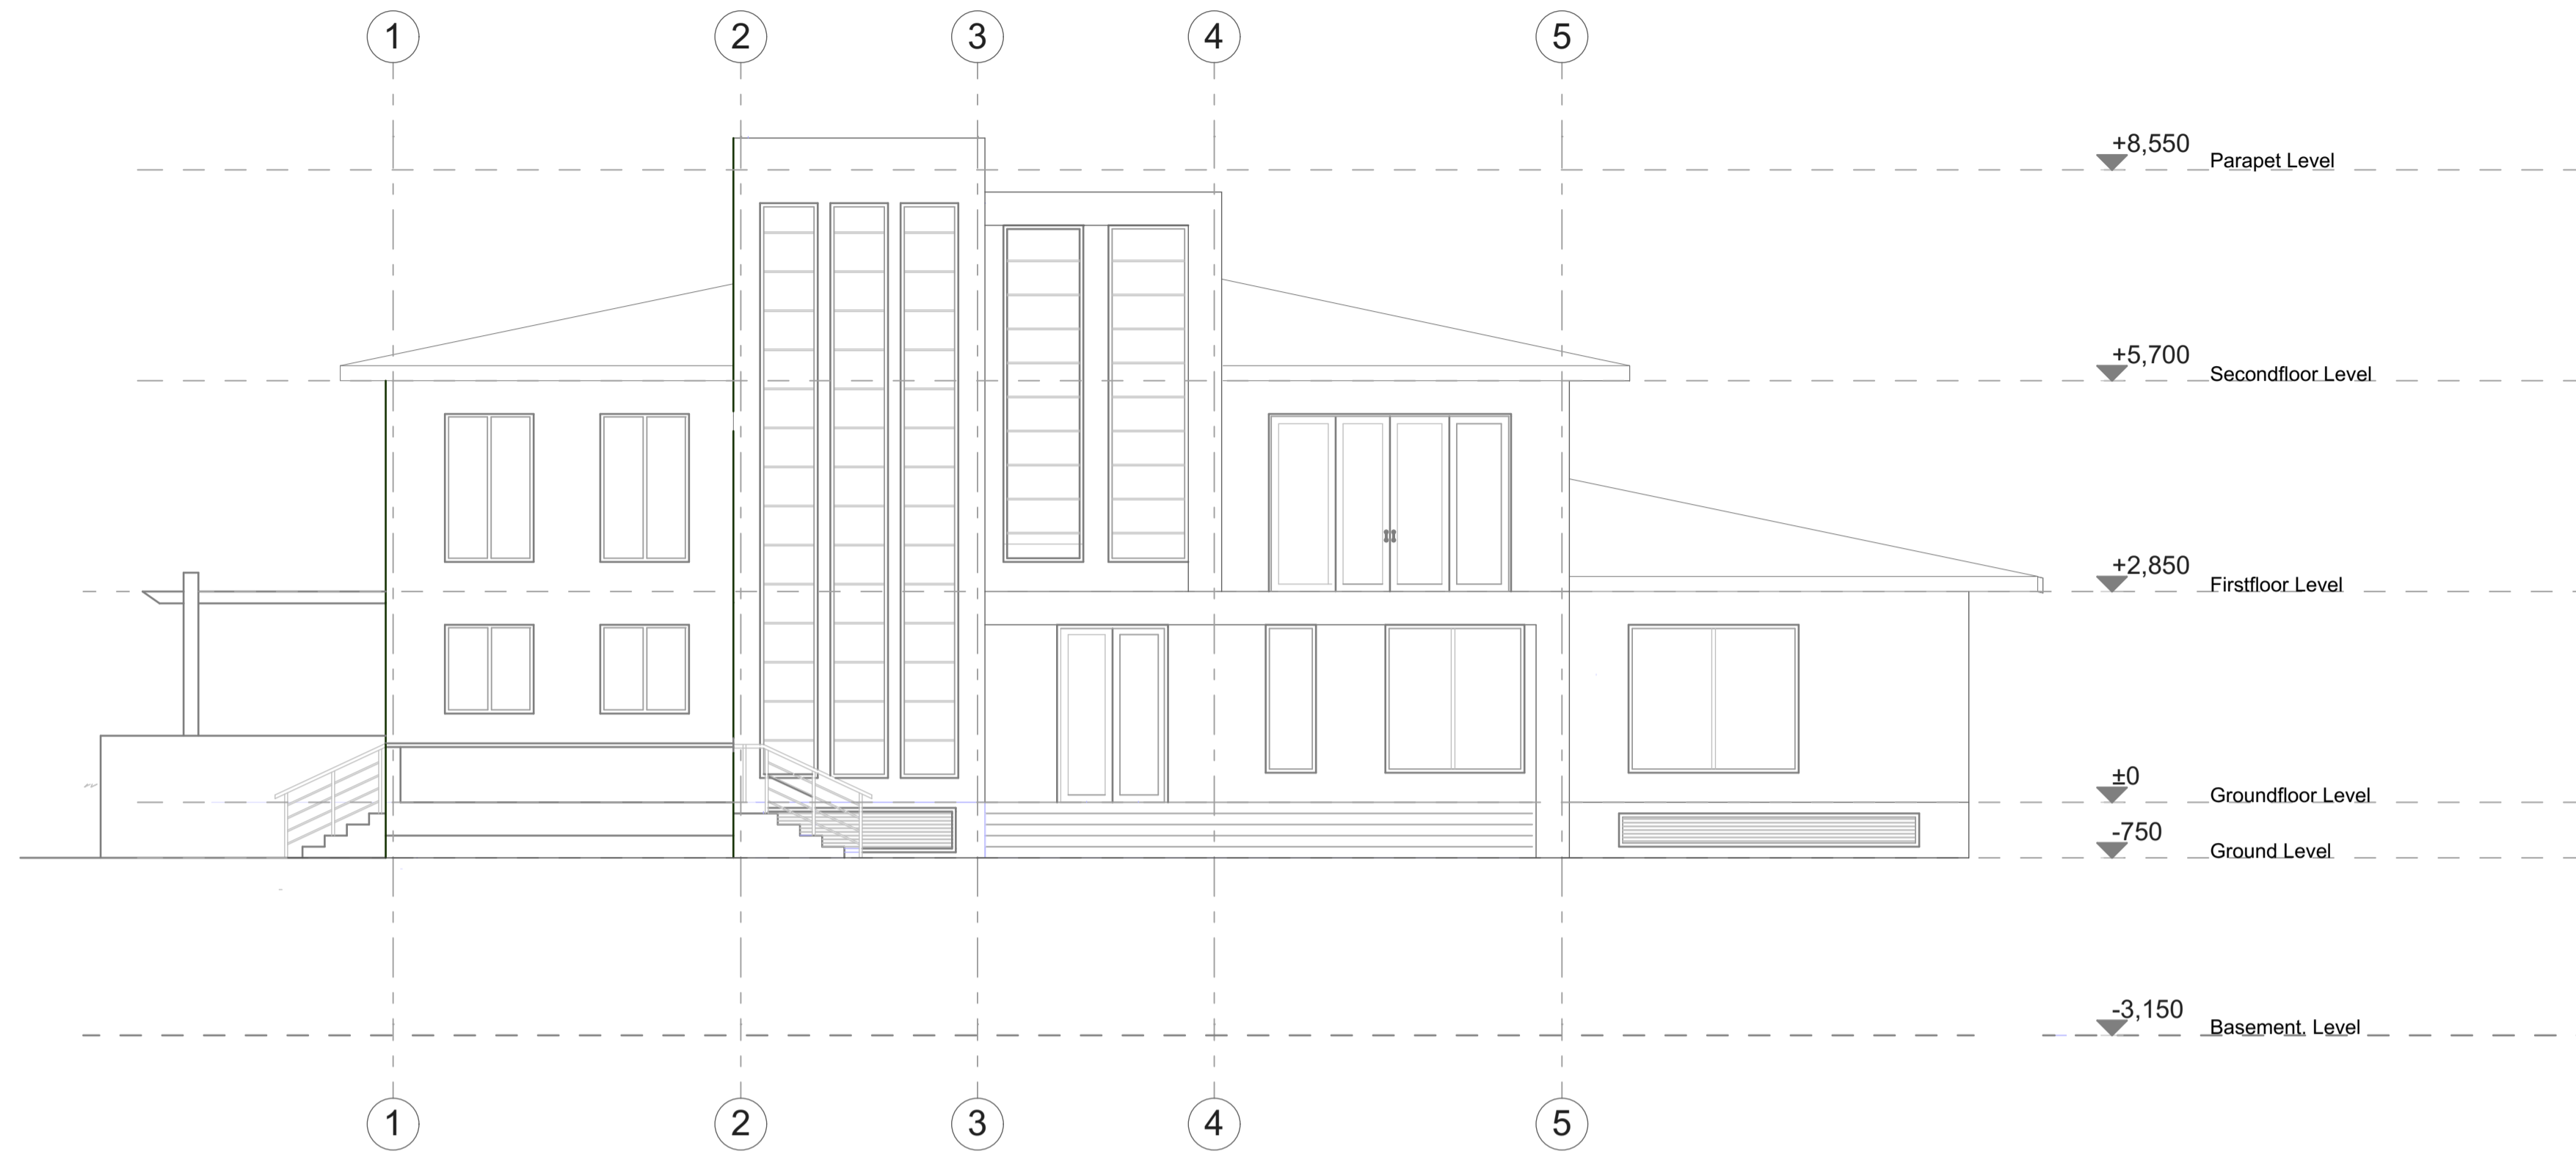

- ARCHITECTURAL NOTES.
- All works to be carried out in accordance with Local Authority regulations.
  - All figured dimensions to be taken in preference to scaled dimensions.
  - All walls below 200mm to be reinforced with hoop iron at every alternative course.
  - Provide damp proof course (D.P.C.) under all walls.
  - P.V. indicates permanent ventilations.
  - All drainage passing under building and drive area to be of pvc pipe and encased in 150mm thick concrete surround.
  - All inspection chambers in drive area to have heavy duty covers.
  - Check all dimensions on site.
  - All sanitary work to be in accordance with MOH rules and regulations and Local Authority requirements.
  - 500g polythene sheeting and anti-termite treatment to be provided under ground floor concrete slab.
  - All reinforced concrete works to Structural Eng. detail.
  - Automatic booster pump for FHRs to be provided to the satisfaction of the Chief Fire Officer.
  - 4500 liters reserve for hosereel.
  - Electrical fire alarm system to the approval of Chief Fire Officer.
  - Fire alarm and booster to be provided with secondary power supply.
  - 2x9 kg Dry Powder Fire Extinguishers at parking areas.
  - 2x9 litre water and 1x4.5 kg CO2 fire extinguishers to be provided per floor.
  - Provide illuminated exit signs.
  - Provide instructional notices.

PROJECT  
**PROPOSED MASSIONATE IN MACHAKOS**

TITLE

Owner's signature \_\_\_\_\_

Architect's signature \_\_\_\_\_

Scale: AS SHOWN	Date: 04 <sup>th</sup> SEP, 2018	Drawn: AYOMA.B.	Checked: EO
Job. No:		Dwg.No:	

# WORKING DRAWINGS

DATE	BY	REVISION



- ARCHITECTURAL NOTES.**
- All works to be carried out in accordance with Local Authority regulations.
  - All figured dimensions to be taken in preference to scaled dimensions.
  - All walls below 200mm to be reinforced with hoop iron at every alternative course.
  - Provide damp proof course (D.P.C.) under all walls.
  - P.V. indicates permanent ventilations.
  - All drainage passing under building and drive area to be of pvc pipe and encased in 150mm thick concrete surround.
  - All inspection chambers in drive area to have heavy duty covers.
  - Check all dimensions on site.
  - All sanitary work to be in accordance with MOH rules and regulations and Local Authority requirements.
  - 500g polythene sheeting and anti-termite treatment to be provided under ground floor concrete slab.
  - All reinforced concrete works to Structural Eng. detail.
  - Automatic booster pump for FHRs to be provided to the satisfaction of the Chief Fire Officer.
  - 4500 liters reserve for hose reel.
  - Electrical fire alarm system to the approval of Chief Fire Officer.
  - Fire alarm and booster to be provided with secondary power supply.
  - 2x9 kg Dry Powder Fire Extinguishers at parking areas.
  - 2x9 litre water and 1x4.5 kg CO2 fire extinguishers to be provided per floor.
  - Provide illuminated exit signs.
  - Provide instructional notices.

PROJECT  
**PROPOSED MASSONATE IN MACHAKOS**

TITLE

Owner's signature \_\_\_\_\_

Architect's signature \_\_\_\_\_

Scale: AS SHOWN	Date: 04 <sup>TH</sup> SEP. 2018	Drawn: AYOMA.B.	Checked: EO
Job. No:	Dwg. No:		